

08-25-00

A

## CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this paper and the documents referred to as attached or enclosed are being deposited with the United States Postal Service on the date set forth below in an envelope as "Express Mail Post Office to Addressee" service under 37 CFR 1.10, with the below indicated mailing label number, addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Date: 8-24-00

Diane M. Hixson

Mailing Label Number: EK347082513US

## IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No. CHUNP0155US

Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231

## NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Byung Taek Kim  
Byoung Hwa Lee

For (title): DUPLEXER DIELECTRIC FILTER

1. Papers Enclosed That Are Required for Filing Date under 37 CFR 1.53(b):

26 Pages of specification including claims1 Pages of Abstract7 Sheets of drawing☒ formal ☐ informal

☐ The enclosed drawing(s) are photograph(s), and there is also attached a "PETITION TO ACCEPT PHOTOGRAPH(S) AS DRAWING(S)." 37 C.F.R. 1.84(b).

2. Additional papers enclosed:

☐ Preliminary Amendment☐ Verified Statement(s) Claiming Small Entity Status (No.     )☒ Assignment to Samsung Electro-Mechanics Co., Ltd.☐ Information Disclosure Statement (37 CFR 1.98)☐ Form PTO-1449 ☐ Citations☐ Other:

09645254-082400

08/24/00  
36777 U.S. PTO08/24/00  
15259/60  
U.S. PTO

3. Declaration or oath: ☒ Enclosed ☐ Not Enclosed.
4. Language: ☒ English ☐ Non-English  
☐ A verified translation is enclosed (37 CFR 1.52(d)).
5. This application claims priority of the below listed application(s) (if any):

Country	Application No.	Filing Date	Certified Copy Enclosed
Korea	1999-35408	August 25, 1999	Yes

6. The filing fee is calculated below.

Fee Calculation					Fee
Basic fee →					\$690.00
Claims*	Number filed		Number extra	Rate	
Total claims	12	-20	0	\$18.00	\$0.00
Independent claims	3	-3	0	\$78.00	\$0.00
Multiple dependent claims (if applicable)				\$260.00	
Total of above					\$690.00
Small entity statement enclosed (1 if Yes, 0 if No) →					\$0.00
Total fee					\$690.00
Non-English language specification				\$130.00	
Fee for recording enclosed assignment				\$40.00	\$40.00
Total fees					\$730.00

\*After any attached preliminary amendment reducing the number of claims and/or deleting multiple dependencies.

004280 42254960

## 7. Form of payment:


- ☐ No fee being paid at this time.
- ☒ A check in the amount of \$ 730.00 to cover the above fees is enclosed.
- ☐ Please charge our Deposit Account No. 18-0988 in the amount of \$\_\_\_\_\_. A duplicate copy of this sheet is enclosed.
- ☐ Fee for extra claims is not being paid at this time.

## 8. The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. 18-0988:

- ☒ 37 CFR 1.16(a), (f) or (g) (filing fees)
- ☒ 37 CFR 1.16(b), (c) and (d) (presentation of extra claims)
- ☒ 37 CFR 1.17 (application processing fees)
- ☒ 37 CFR 1.16(e) (surcharge for filing the basic filing fee and/or declaration on a date later than the filing date of the application)

## 9. Credit any overpayment to Deposit Account No.18-0988.

Respectfully submitted,

Date: 8-24-00

Don W. Bulson  
Reg. No. 28,192  
RENNER, OTTO, BOISSELLE & SKLAR, LLP  
1621 Euclid Avenue, Nineteenth Floor  
Cleveland, Ohio 44115-2191  
Tel: 216-621-1113  
Fax: 216-621-6165

## DUPLEXER DIELECTRIC FILTER

### BACKGROUND OF THE INVENTION

#### Field of the Invention

004280-4525490  
094524-082400

The present invention relates, in general, to duplexer dielectric filters and, more particularly, to a duplexer dielectric filter having an open area free from a conductive layer on the side surface of a dielectric block within a reception area, thus reducing the loading capacitance and increasing the coupling capacitance between neighboring resonators, and thereby producing a desired small-sized duplexer dielectric filter.

#### Description of the Prior Art

As is well known to those skilled in the art and the general public, mobile communication systems using super high frequency band waves have been largely substituted for conventional wire communication systems. Therefore, cellular phones are widely used and are subjected to active research and development to improve their operational performance and keep up with the recent trend toward compactness, smallness and lightness thereof.

A duplexer filter is designed to commonly transmit and receive signals using one antenna at the same time. Such a

00647254-002400

duplexer filter comprises a reception filter and a transmission filter. The reception filter passes reception frequency components, but suppresses transmission frequency components. On the other hand, the transmission filter passes transmission frequency components, but suppresses reception frequency components. In order to use such duplexer filters in cellular phones, it is necessary that said duplexer filters be made to occupy a very small space. Such an object may be accomplished by integrated duplexer dielectric filters.

Fig. 1 is a perspective view showing the construction of a conventional integrated duplexer dielectric filter. As shown in the drawing, the conventional integrated duplexer dielectric filter comprises a dielectric block 1 having a generally cubic-shape. This duplexer dielectric filter has two filtering areas: a transmission area 10 and a reception area 20. The dielectric block 1 has an upper surface 3, a lower surface, and a side surface 5. A conductive material is coated on the lower surface and the side surface 5. A series of resonating holes 7 are regularly and parallelly formed in the dielectric block 1 in such a way that the holes 7 completely extend from the upper surface 3 to the lower surface and are spaced apart from each other at regular intervals. The resonating holes 7 are entirely coated with a conductive material on their internal surfaces, thereby forming desired resonators.

A conductive pattern 9, having a predetermined size, is formed on the upper surface 3 of the dielectric block 1 at a position around each of the resonating holes 7. Such conductive patterns 9 are connected to the conductive layers 5 on the internal surfaces of the resonating holes 7, thus forming a loading capacitance between the resonating holes 7 and the conductive layer of the side surface 5, and forming a coupling capacitance between neighboring resonators. The resonance frequency of the resonators is determined by both the resonating holes 7 and the loading capacitance, while the coupling capacitance couples the resonators to each other. The transmission area 10 and the reception area 20 of the upper and side surfaces 3 and 5 of the dielectric block 1 are provided with transmission and reception terminals 12a and 12b for accomplishing the signal transmission and reception operation. An antenna terminal 12c, consisting of a conductive pattern, is formed at a position between the transmission and reception areas 10 and 20.

Fig. 2 is an equivalent circuit diagram of the duplexer dielectric filter of Fig. 1. In the drawing, the reference character "R" denotes transmitting lines, each of which is always opened at one end thereof by an associated resonating hole 7 of the dielectric block 1. The loading capacitance  $C_{ti}$ ,  $C_{ri}$  ( $i = 1, 2, \dots$ ), formed between the resonating holes 7 and the conductive layer on the side surface 5 of the

dielectric block 1, is connected to the open ends of the signal transmitting lines. A desired resonating circuit is formed by both the signal transmitting lines  $R_{ti}$ ,  $R_{ri}$  ( $i = 1, 2, \dots$ ) and the loading capacitance.

In a conventional duplexer dielectric filter, it is necessary to accomplish both desired signal transmitting characteristics within a transmission frequency band and desired attenuation characteristics within a low frequency band. The desired transmission characteristics within the transmission frequency band are determined by a coupling of the resonance frequency of the resonators, determined by both the signal transmitting lines  $R_{ti}$ ,  $R_{ri}$  and the loading capacitance  $C_{ti}$ ,  $C_{ri}$ , the coupling capacitance  $C_{tij}$ ,  $C_{rij}$  ( $i, j = 1, 2, \dots$ ), and electromagnetic coupling values  $M_{tij}$ ,  $M_{rij}$  ( $i, j = 1, 2, \dots$ ). The desired attenuation characteristics within the low frequency band are determined by a coupling. That is, both the attenuation characteristics and the frequency of an attenuation pole are determined by a combination of the coupling capacitance and magnetic coupling values.

In the conventional duplexer dielectric filters, the high frequency band within the transmission area is relatively lower than that of the reception area. Therefore, the electric field effect between the resonating holes is relatively higher within the reception area than that of the

transmission area, but the magnetic field effect between the resonating holes is relatively higher in the transmission area than that of the reception area. Therefore, the resonators within the reception area form a capacitance coupling, but the  
5 resonators within the transmission area form an inductance coupling.

In such a conventional duplexer dielectric filter, the determination of the resonance frequency or the coupling between the resonators are changed in accordance with the size  
10 of the conductive patterns 9 formed on the upper surface 3 of the dielectric block 1. In other words, the operational characteristics of the duplexer dielectric filters are changed in accordance with both the gap between the conductive patterns 9 and the conductive layer of the side surface 5, and  
15 the gap between the conductive patterns 9.

As described above, in order to determine the resonance frequency of the duplexer dielectric filter, it is necessary to control the distance between the conductive patterns 9, formed on the upper surface 3 of the dielectric block 1, and  
20 the conductive layer formed on the side surface 5 of the dielectric block 1. However, in a conventional duplexer dielectric filter, the resonance frequency within the transmission area is lower than that of the reception area, and so it is necessary to make the loading capacitance within  
25 the transmission area higher than that of the reception area.



In order to form a high loading capacitance within the transmission area, it is necessary to enlarge the size of the conductive patterns 9 within the transmission area and to complicate the arrangement of those conductive patterns 9.

- 5       The length of the signal transmitting lines within the transmission area 10 is equal to that of the reception area 20, and so it is necessary to properly control both the loading capacitance and the coupling capacitance so as to accomplish the desired filtering characteristics of the
- 10   duplexer dielectric filter. Such a capacitance may be properly controlled by changing the pattern and size of the conductive patterns 9. When the size of the dielectric block 1 is reduced to achieve the desired compactness, smallness and lightness of the duplexer dielectric filter, the following
- 15   problems may be generated:

- When forming the conductive patterns 9 through a screen printing process that is the most typical process, the line width or the line interval is about 150  $\mu\text{m}$ . The maximum loading capacitance is thus undesirably reduced in accordance
- 20   with a reduction in the printed area for the conductive patterns 9 during such a screen printing process. Therefore, in the case of the transmission terminal, it is necessary to lengthen the signal transmitting line R so as to maintain the loading capacitance at a preset level, although it is desired
- 25   to reduce the size of the duplexer dielectric filter.

On the other hand, the length of the signal transmitting lines within the reception area 20 is equal to that of the transmission area 10, and so the resonance frequency of the signal transmitting line is reduced in inverse proportion to the length of the signal transmitting line. In such a case, the size of the conductive patterns is reduced. Since the size of the conductive patterns within the reception area is smaller than that of the transmission area due to the coupling capacitance, there is a limit to the possible reduction in the size of the conductive patterns within the reception area. For example, when using a dielectric block that is thinner than a conventional dielectric block, the resonance frequency of the signal transmitting line is reduced, but the gap between the conductive patterns is increased due to the reduction in the size of the conductive patterns. This finally reduces the coupling capacitance. Therefore, it is almost impossible to form a coupling capacitance having a desired value. When the dielectric block is reduced in thickness, the length of the signal transmitting line is increased in accordance with the preset loading capacitance. This finally reduces the market competitiveness of the resulting duplexer dielectric filter, since the production cost of such filters is undesirably increased.

#### SUMMARY OF THE INVENTION

Accordingly, the present invention has been made keeping in mind the above problems occurring in the prior art, and an object of the present invention is to provide a duplexer dielectric filter, which has an open area free from a conductive layer on the side surface of a dielectric block within a reception area, thus properly controlling both the loading capacitance and the coupling capacitance of a resonator.

Another object of the present invention is to provide a duplexer dielectric filter, which has an open area free from a conductive layer on the side surface of a dielectric block within a reception area, thus reducing the loading capacitance and increasing the coupling capacitance, and thereby producing a desired small-sized and light duplexer dielectric filter.

In order to accomplish the above object, the present invention provides a duplexer dielectric filter, comprising: a dielectric block having an upper surface, a lower surface, and a side surface, with a conductive material coated on at least a part of the lower and side surfaces; a reception area for filtering a received signal, the reception area comprising at least one resonator including a resonating hole, the resonating hole completely extending from the upper surface to the lower surface of the dielectric block while being at least partially coated with a conductive material on its internal surface; a transmission area for filtering a signal to be

transmitted, the transmission area comprising at least one resonator including a resonating hole, the resonating hole completely extending from the upper surface to the lower surface of the dielectric block while being at least partially coated with a conductive material on its internal surface; a transmission terminal for accomplishing a signal transmission operation, the transmission terminal comprising an electrode area formed on the upper and side surfaces of the dielectric block at a position corresponding to the transmission area while being insulated from the conductive material coated on the side surface of the dielectric block; a reception terminal for accomplishing a signal reception operation, the reception terminal comprising an electrode area formed on the upper and side surfaces of the dielectric block at a position corresponding to the reception area while being insulated from the conductive material coated on the side surface of the dielectric block; an antenna terminal arranged between the reception and transmission areas and comprising an electrode area insulated from the conductive material coated on the side surface of the dielectric block; and an open area formed on at least a part of the side surface of the dielectric block at a position corresponding to the reception area while being free from a conductive material, the open area controlling both a coupling capacitance and a loading capacitance of the resonators.

004280452496

In the above duplexer dielectric filter, the loading capacitance and the coupling capacitance is changed in accordance with the size of the open area defining the gap between the ground electrode and the resonators. The open area may be formed on the side surface of the dielectric block at one position or may be formed at a plurality of positions corresponding to the resonators within the reception area.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The above and other objects, features and other advantages of the present invention will be more clearly understood from the following detailed description taken in conjunction with the accompanying drawings, in which:

Fig. 1 is a perspective view showing the construction of a conventional duplexer dielectric filter;

Fig. 2 is an equivalent circuit diagram of the duplexer dielectric filter of Fig. 1;

Fig. 3 is a perspective view showing the construction of a duplexer dielectric filter in accordance with the primary embodiment of the present invention;

Figs. 4A and 4B are perspective views, respectively showing the construction of duplexer dielectric filters in accordance with the second and third embodiments of the present invention;

Figs. 5A and 5B are views showing the values of both the loading capacitance and the coupling capacitance when forming an open area on the dielectric block of the filter;

Fig. 6A is a perspective view showing the construction of a duplexer dielectric filter in accordance with the fourth embodiment of the present invention; and

Fig. 6B is an equivalent circuit diagram of the duplexer dielectric filter of Fig. 6A.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Fig. 3 is a perspective view showing the construction of a duplexer dielectric filter in accordance with the primary embodiment of the present invention. As shown in the drawing, the duplexer dielectric filter according to the present invention comprises a dielectric block 101 having a generally cubic-shape. The dielectric block 101 has an upper surface 103, a lower surface, and a side surface 105. A series of resonating holes 107 are regularly and parallelly formed in the dielectric block 101 in such a way that the holes 107 completely extend from the upper surface 103 to the lower surface and are spaced apart from each other at regular intervals. A conductive material is coated on at least a part of the side surface 105 between the upper surface 103 and the lower surface, thus forming a ground electrode. The

resonating holes 107 are also coated with a conductive material on at least a part of their internal surfaces, thereby forming resonators. The upper surface 103 is provided with an open area free from such a conductive material.

5       At least one conductive pattern 109, having a predetermined size, is formed on the upper surface 103 of the dielectric block 101 at a position around each of the resonating holes 107. Such conductive patterns 109 are connected to the conductive layers on the internal surfaces of  
10 the resonating holes 107, thus forming loading capacitance between the resonating holes 107 and the conductive layer of the side surface 105 and forming coupling capacitance between neighboring resonators. The upper and side surfaces 103 and 105 of the dielectric block 101 are provided with transmission  
15 and reception terminals 112a and 112b for accomplishing the transmission and reception operation in addition to an antenna terminal 112c.

The duplexer dielectric filter of this invention has two filtering areas: a first filtering area and a second filtering  
20 area. When the received signal from the antenna terminal is filtered by the first filtering area, the second filtering area filters the signal to be transmitted from the end of an antenna. As is well known to those skilled in the art, it is not always necessary to specifically designate the  
25 reception area and the transmission area in a conventional

dielectric filter. In addition, the reception area and the transmission area in a duplexer dielectric filter having the same construction may be changed in accordance with the manufacturer's wishes. Therefore, it should be understood  
5 that the designation of the reception area and the transmission area in the duplexer dielectric filter of this invention is only for ease of description, but is not to be interpreted as, or used for, any limitation of this invention.

In the embodiment of Fig. 3, the three resonating holes,  
10 formed in the dielectric block at the left-hand side of the antenna terminal 112c, are included within the transmission area 110, at which high frequency signals are transmitted from the filter. On the other hand, the three resonating holes, formed in the dielectric block at the right-hand side of the  
15 antenna terminal 112c, are included within the reception area 120, at which high frequency signals are received into the filter. Of course, it is not necessary to limit the number of the resonating holes within each filtering area. Of the two filtering areas, the reception area 120 passes the reception  
20 frequency components, but suppresses the transmission frequency components. On the other hand, the transmission area 110 passes the transmission frequency components, but suppresses the reception frequency components.

An open area 125 free from any conductive layer is formed  
25 on the side surface 105 of the dielectric block 101 within the



reception area 120. The open area 125 controls both the loading capacitance formed between the conductive patterns 109 within the reception area 120 and the ground electrode of the side surface 105 and the coupling capacitance between the conductive patterns 109. The control of both the loading capacitance and the coupling capacitance will be described in detail as follows, with reference to Figs. 5a and 5b.

When two resonators R1, R2 are formed between the ground electrodes in the same manner as expected from a conventional duplexer dielectric filter as shown in Fig. 5A, a loading capacitance  $2Ct1$ ,  $2Ct2$  ( $Ct1$  is a random value) is formed between the resonators R1, R2 and the ground electrodes. In addition, a coupling capacitance  $1Ct12$  ( $Ct12$  is a random value) is formed between the resonators R1, R2. On the other hand, when the ground electrode is partially open as expected from the present invention as shown in Fig. 5B, a loading capacitance  $1Ct1$  is formed between the resonators R1, R2 and the ground electrodes. In addition, a coupling capacitance  $2Ct12$  is formed between the resonators R1, R2.

When the open area 125 is formed on the side surface 105 of the dielectric block 101 as described above, the loading capacitance is reduced, but the coupling capacitance is increased. Such a reduction in the loading capacitance results in an increase in the size of the conductive patterns 109. Therefore, even when the thickness of the dielectric

block 101 is reduced below a reference level due to a reduction in the loading capacitance, it is possible to form conductive patterns 109 having a desired size within the reception area 120. Therefore, even though the coupling capacitance is reduced due to an increase in the distance between the conductive patterns 109 in the duplexer dielectric filter of this invention, the coupling capacitance is increased due to the open area on the ground electrode. It is thus possible to accomplish a desired coupling capacitance.

The loading capacitance, formed between the conductive patterns 109 and the ground electrodes, is changed in accordance with the distance between the conductive patterns 109 and the ground electrodes. It is thus possible to control the loading capacitance of the resonating holes 107 by changing the distance between the ground electrodes and the resonating holes 107 within the reception area 120. This may be accomplished by changing the shape of the open area 125, for example, by forming a step on the open area 125 as shown in the drawing.

In the embodiment of Fig. 3, the open area 125 is formed on the front part of the side surface 105 of the dielectric block 101. However, it should be understood that the position of the open area 125 is not limited to the front part of the side surface 105. That is, the open area 125 may be formed on the rear part of the side surface 105 of the dielectric block

101. In such a case, the open area 125 performs the above-mentioned operational function, thus controlling the loading capacitance between the conductive patterns 109 and the ground electrodes. In other words, the open area 125 of this invention may be freely formed on any part of the side surface 105 of the dielectric block 101 at a position corresponding to the resonating holes 107 within the reception area 120. The position of the open area 125 on the side surface 105 of the dielectric block 101 does not influence the operational function of the resulting duplexer dielectric filter of this invention. That is, the open area 125 of this invention may be formed on any part of the side surface 105 of the dielectric block 101 at a position corresponding to the resonating holes 107 within the reception area 120 without influencing the operational function of the resulting duplexer dielectric filter of this invention.

In addition, two open areas 125 may be formed on the side surface 105 at opposite positions corresponding to the resonating holes 107 within the reception area 120. In such a case, it is possible to desirably reduce the size of each open area 125, different from the embodiment having one open area 125 formed on only one part of the side surface 105. When two open areas 125 are formed on the side surface 105 at opposite positions corresponding to the resonating holes 107 within the reception area 120 as described above, it is possible to

accomplish a desired high loading capacitance between the ground electrodes and the resonating holes while desirably reducing the size of the open area 125.

As described above, the shape of the open area 125 in the duplexer dielectric filter of this invention is not limited. In the primary embodiment of Fig. 3, the open area 125 is integrated with the open areas of both the reception terminal 112b and the antenna terminal 112c. However, in the second embodiment of Fig. 4A, the open area 225 may be formed to be isolated from the open areas of both the reception terminal 212b and the antenna terminal 212c. In addition, it is also possible to form a number of open areas at positions corresponding to the conductive patterns 209 formed on the upper surface 203 of the dielectric block 101 as shown in Fig. 4B, showing the third embodiment of the present invention. In the second and third embodiments, the open area 225 is not limited in its shape, but may be somewhat freely altered in shape while being spaced apart from the conductive patterns 209 by a desired distance. It is thus possible to form a desired loading capacitance. Particularly in the third embodiment of Fig. 4B, the desired loading capacitance may be more easily formed by making the sizes of the open areas 225, corresponding to the conductive patterns 209, different from each other.

Fig. 6A is a perspective view showing the construction of

064234-08400

a duplexer dielectric filter in accordance with the fourth embodiment of the present invention. Fig. 6B is an equivalent circuit diagram of the duplexer dielectric filter of Fig. 6A. In the fourth embodiment, the general shape of the duplexer dielectric filter remains the same as that described for the primary embodiment of Fig. 3, but the structure of the open area 325 is altered.

In the duplexer dielectric filter according to the fourth embodiment, an open area 325, having a predetermined size, is formed on the side surface 305 of the dielectric block 301 at a position corresponding to the resonating holes 307 within the reception area. A conductive pattern 330, having a predetermined length, is formed on the open area 325. In the fourth embodiment, the conductive pattern 330 extends in parallel to the side between the upper surface 303 and the side surface 305 of the dielectric block 301. However, it should be understood that the conductive pattern 330 may extend while being inclined to the side between the upper surface 303 and the side surface 305.

As shown in the equivalent circuit diagram of Fig. 6B, the conductive pattern 330 acts as a means for giving a capacitance  $Cr2'$  to the resonator  $Rr2'$  of the reception terminal. Due to the capacitance  $Cr2'$  added to the resonator  $Rr2'$ , it is possible for the duplexer dielectric filter to accomplish a desired reduction ratio at a low frequency band

within the reception area, thus improving the signal filtering effect of the duplexer dielectric filter. The value of the capacitance is controllable by changing the length of the conductive pattern 330 of Fig. 6A. That is, a capacitance is  
5 formed between the conductive pattern 330 and the resonating holes 307 of the reception area in accordance with the overlapped structure of the conductive pattern 330 and the resonating holes 307, thus finally forming the desired capacitance  $Cr2'$ . The value of the capacitance  $Cr2'$  is  
10 changed in accordance with the distance between the conductive pattern 330 of the open area 325 and the conductive patterns 309 around the resonating holes 307. That is, the value of the capacitance  $Cr2'$  is increased in proportion to the distance between the conductive pattern 330 of the open area  
15 325 and the conductive patterns 309 around the resonating holes 307.

In the fourth embodiment of the present invention, it is possible to form two or more conductive patterns 330 on the dielectric block 301. In addition, the shape of the open area  
20 325 is not limited. That is, the conductive pattern 330 of the fourth embodiment may be formed on an open area having any shape in addition to the shapes shown in Figs. 3, 4a and 4b without affecting the functioning of this invention.

As described above, the present invention provides a  
25 duplexer dielectric filter having an open area free from a

004534 0040

conductive layer on the side surface of a dielectric block within a reception area, thus forming a desired loading capacitance and a desired coupling capacitance. Therefore, it is possible to achieve the desired filtering characteristics even with small-sized duplexer dielectric filters. In addition, a conductive pattern, having a predetermined size, is formed on the open area, thus adding an attenuation pole in the reception area of the duplexer dielectric filter. This improves the operational performance of the resulting duplexer dielectric filter.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

**WHAT IS CLAIMED IS:**

1. A duplexer dielectric filter, comprising:

5 a dielectric block having an upper surface, a lower surface, and a side surface, with a conductive material coated on at least a part of the lower and side surfaces;

10 a first filtering area for filtering first signals, said first filtering area including at least one resonator having a resonating hole, said resonating hole completely extending from the upper surface to the lower surface of said dielectric block and being at least partially coated with a conductive material on its internal surface;

15 a second filtering area for filtering second signals, said second filtering area including at least one resonator having a resonating hole, said resonating hole completely extending from the upper surface to the lower surface of said dielectric block and being at least partially coated with a conductive material on its internal surface;

20 reception and transmission terminals for accomplishing signal reception and transmission operation, said reception and transmission terminals respectively comprising an electrode area insulated from the conductive material coated on the side surface of the dielectric block;

25 an antenna terminal arranged between said first and second filtering areas and comprising an electrode area



insulated from the conductive material coated on the side surface of the dielectric block; and

a first open area formed on at least a part of said side surface of the dielectric block at a position corresponding to the first filtering area while being free from a conductive material, said first open area controlling both a coupling capacitance and a loading capacitance of the resonators.

2. The duplexer dielectric filter according to claim 1, wherein said reception terminal, transmission terminal and antenna terminal are insulated from the conductive material formed on the side surface of the dielectric block by a second open area.

3. The duplexer dielectric filter according to claim 1, wherein said coupling capacitance and loading capacitance of the resonators are changed in accordance with a size of said first open area.

4. The duplexer dielectric filter according to claim 2, wherein said first and second open areas are integrated with each other.

5. The duplexer dielectric filter according to claim 2, wherein said first and second open areas are isolated from

each other.

6. The duplexer dielectric filter according to claim 1,  
wherein two or more resonators are formed in the first  
5 filtering area of the dielectric block, with a plurality of  
first open areas being formed on the side surface of the  
dielectric block at positions corresponding to said resonators  
within the first filtering area.

10 7. The duplexer dielectric filter according to claim 1,  
further comprising at least one conductive pattern, said  
conductive pattern being formed on said dielectric block  
within the first open area, with a capacitance formed between  
said conductive pattern and the resonating hole of the first  
15 filtering area, thus forming an attenuation pole.

8. The duplexer dielectric filter according to claim 7,  
wherein said conductive pattern is formed along the resonating  
hole within the first filtering area.

20 9. The duplexer dielectric filter according to claim 7,  
wherein said capacitance is changed in accordance with a  
length of said conductive pattern corresponding to the  
resonating hole within the first filtering area.

10. The duplexer dielectric filter according to claim 7, wherein said capacitance is changed in accordance with a distance between said conductive pattern and said resonating hole within the first filtering area.

5

11. A duplexer dielectric filter, comprising:

a dielectric block having an upper surface, a lower surface, and a side surface, with a conductive material coated on at least a part of said lower and side surfaces;

10 a series of resonating holes completely and parallelly extending from the upper surface to the lower surface of said dielectric block and at least partially coated with a conductive material on their internal surfaces, thus forming resonators;

15 reception and transmission terminals respectively comprising an electrode area insulated from the conductive material coated on the side surface of the dielectric block, said reception and transmission terminals being electromagnetically coupled to said resonators; and

20 an open area comprising at least one area formed on at least a part of said side surface of the dielectric block while being free from a conductive material, said open area controlling both a coupling capacitance and a loading capacitance of the resonators.

25

12. A duplexer dielectric filter, comprising:

a dielectric block having an upper surface, a lower surface, and a side surface, with a conductive material coated on at least a part of the lower and side surfaces;

5 a reception area for filtering a received signal, said reception area comprising at least one resonator including a resonating hole, said resonating hole completely extending from the upper surface to the lower surface of said dielectric block while being at least partially coated with a conductive  
10 material on its internal surface;

a transmission area for filtering a signal to be transmitted, said transmission area comprising at least one resonator including a resonating hole, said resonating hole completely extending from the upper surface to the lower  
15 surface of said dielectric block while being at least partially coated with a conductive material on its internal surface;

a transmission terminal for accomplishing a signal transmission operation, said transmission terminal comprising  
20 an electrode area formed on the upper and side surfaces of the dielectric block at a position corresponding to the transmission area while being insulated from the conductive material coated on the side surface of the dielectric block;

a reception terminal for accomplishing a signal reception  
25 operation, said reception terminal comprising an electrode

area formed on the upper and side surfaces of the dielectric block at a position corresponding to the reception area while being insulated from the conductive material coated on the side surface of the dielectric block;

- 5        an antenna terminal arranged between said reception and transmission areas and comprising an electrode area insulated from the conductive material coated on the side surface of the dielectric block; and

- 10        an open area formed on at least a part of said side surface of the dielectric block at a position corresponding to the reception area while being free from a conductive material, said open area controlling both a coupling capacitance and a loading capacitance of the resonators.

# ABSTRACT

004280 452546  
09645254 082400

A duplexer dielectric filter is disclosed. This filter has a dielectric block, with reception and transmission areas  
5 formed on the dielectric block and respectively having a resonator formed by a resonating hole. This resonating hole is at least partially coated with a conductive material on its internal surface. Reception and transmission terminals are formed on the upper and side surfaces of the dielectric block  
10 at positions corresponding to the reception and transmission areas and are insulated from the conductive material of the side surface of the dielectric block. An antenna terminal is arranged between the reception and transmission areas. An open area, free from a conductive material, is formed on at  
15 least a part of the side surface of the dielectric block at a position corresponding to the reception area. This open area controls both the coupling capacitance and the loading capacitance of the resonators since the loading capacitance and the coupling capacitance are changed in accordance with  
20 the size of the open area. The open area may be formed on the side surface of the dielectric block at one position or may be formed at a plurality of positions corresponding to the resonators within the reception area.

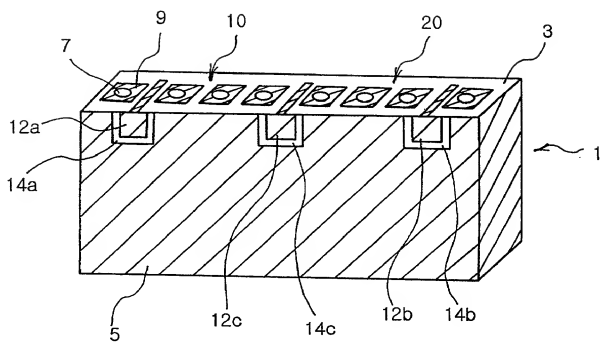


FIG. 1  
PRIOR ART

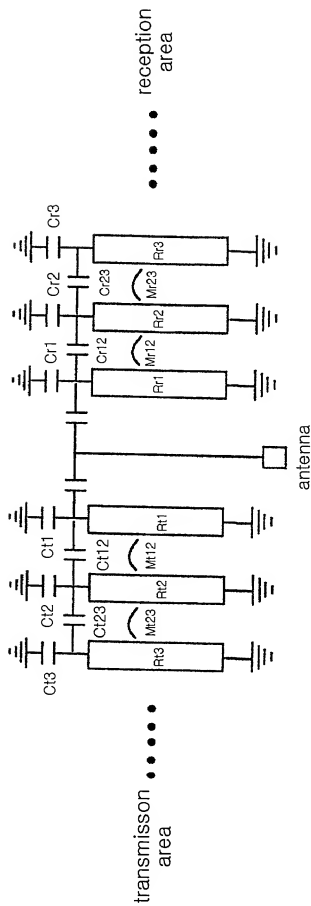


FIG. 2  
PRIOR ART



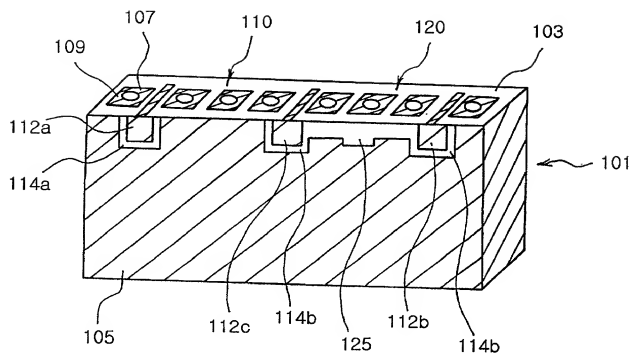


FIG. 3

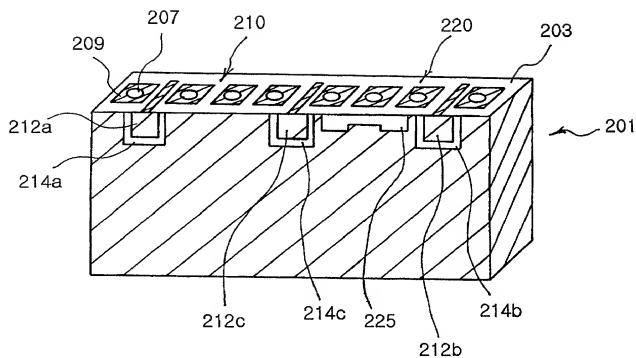


FIG. 4A

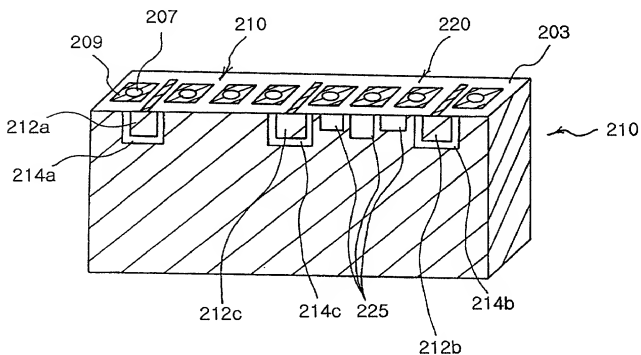


FIG. 4B




FIG. 5A




FIG. 5B

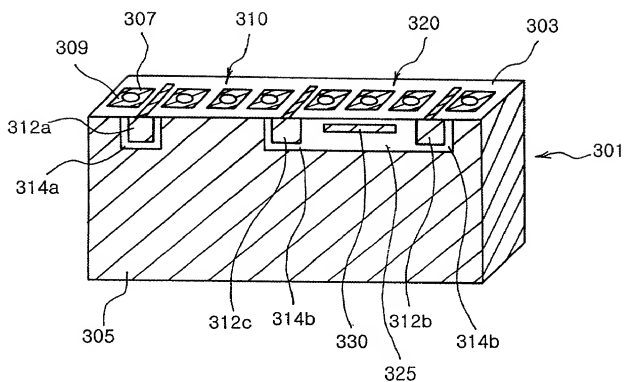


FIG. 6A

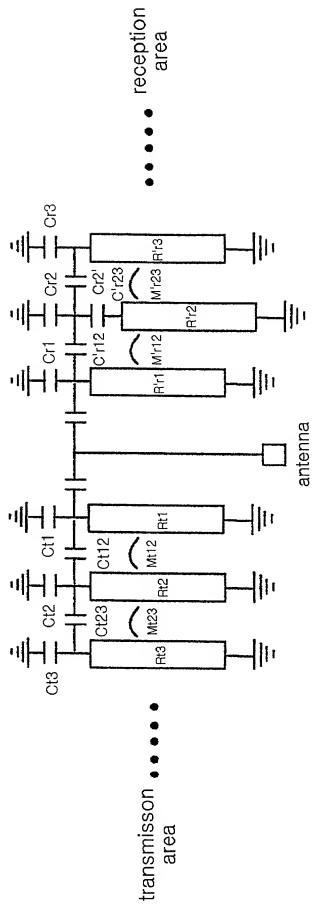


FIG. 6B

Attorney Docket No. CHUNPO155US

PATENT (OUS)

**COMBINED DECLARATION AND POWER OF ATTORNEY**  
(ORIGINAL, DESIGN, NATIONAL STAGE OF PCT)

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name; and I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

Title: DUPLEXER DIELECTRIC FILTER

the specification of which

☒ is attached hereto, or

☐ was filed as United States Application No.:  
Application or PCT International (Express Mail Label No.)  
Application (give Express Mail label Filing Date:  
number and deposit date if (Deposit Date)  
Application number not yet known): Amended on (if applicable):

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations §1.56(a).

**PRIORITY CLAIM**

I hereby claim priority benefits under Title 35, United States Code, §119 of (i) any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed; and (ii) any United States provisional application(s) that is/are listed below.

☐ no such applications have been filed.  
☒ such applications have been filed as follows.

**EARLIEST FOREIGN/PROVISIONAL APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	PRIORITY CLAIMED	
			Yes	No
KOREA	1999-35408	25 August 1999	XX	

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS  
(6 MONTHS FOR DESIGN) PRIOR TO THIS U.S. APPLICATION**

POWER OF ATTORNEY

As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (List name and registration number)

Armand P. Boisselle, Reg. No. 22,381; Warren A. Sklar, Reg. No. 26,373; Don W. Bulson, Reg. No. 28,192

The undersigned to this declaration and power of attorney hereby authorizes the U.S. attorney(s) named herein to accept and follow instructions from

Authorized representative: C & S Patent and Law Office, C-2306 Daelim Acrotel, 467-6,  
Dogok-dong, Gangnam-gu, Seoul 135-270, Korea

as to any actions to be taken in the Patent and Trademark Office regarding this application without direct communication between the U.S. attorney(s) and the undersigned. In the event of a change in the person(s) from whom instructions may be taken, the U.S. attorney(s) will be so notified by the undersigned.

Send Correspondence To

Don W. Bulson, Esq.  
Renner, Otto, Boisselle & Sklar, P.L.L.  
1621 Euclid Ave., 19th Floor  
Cleveland, Ohio 44115

Direct Telephone Calls To:

(name and telephone number)

Don W. Bulson

(216) 621-1113

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with knowledge that willful false statements and the like are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued therein.

<b>Full Name of Sole or First Inventor:</b> BYUNG TAEK KIM			
Inventor's signature:	<i>Byung Taek Kim</i>	Date:	<i>August 16, 2000</i>
Residence: (City & State/Country):	Ansan-si, Kyungki-do, Korea	Citizenship:	Republic of Korea
Post Office Address:	581-6 Il-dong, Ansan-si, Kyungki-do, Republic of Korea		

<b>Full Name of Additional Joint Inventor (if any):</b> BYOUNG HWA LEE			
Inventor's signature:	<i>Byoung Hwa Lee</i>	Date:	<i>August 16, 2000</i>
Residence: (City & State/Country):	Seongnam-si, Kyungki-do, Korea	Citizenship:	Republic of Korea
Post Office Address:	210-802 Hansin Apt., Emae-dong, Pundang-ku, Seongnam-si, Kyungki-do, Republic of Korea		

CHECK FOR ANY OF THE FOLLOWING ADDED PAGE(S) WHICH  
FORM A PART OF THIS DECLARATION

- [ ] Signature for additional joint inventors.  
[ ] Added page to combined declaration and power of attorney for divisional, continuation, or continuation-in-part (CIP) application.  
[x] This declaration ends with this page.

00645254, 0824106